


# POWER DISTRIBUTION PANEL

For Hazardous Locations

STAHL

ELECTROMACH

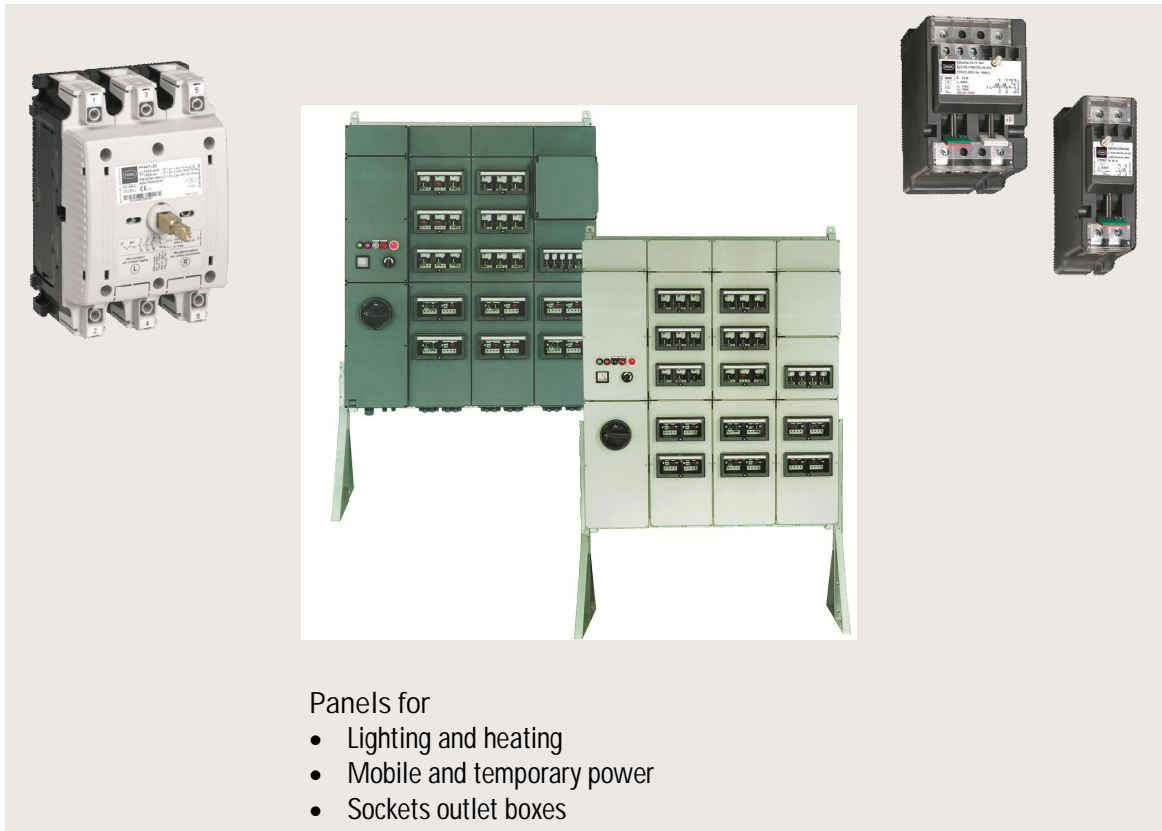

Panels for

- Lighting and heating
- Mobile and temporary power
- Sockets outlet boxes

Save time and money by more technical potential

Additional scope of application with new switches & breakers

Particular product features of these modules meet your demands of a modern installation:

- Thanks to plastic technology
  - corrosion resistant
  - light weight design
  - easy to maintain
- Easy to retrofit with additional circuits
- Cost efficient installation due to easy cable entry and wiring
- Worldwide in use ATEX - IECEx - NEC - CEC certification
- Reliable and proven technology for example since 1973 in the North Sea, 1981 in Middle East and 2001 in Canada
- Safe and simple clear design for easy installation
- Stainless steel or GRP materials for all environmental conditions
- Breaker operable under life conditions with lockable window flaps
- Clearly visible outgoing status at window or handle

**ELECTROMACH B.V.**

Jan Tinbergenstraat 193  
7559 SP Hengelo  
The Netherlands

T +31 (0)74 2 472 472  
F +31 (0)74 2 435 925  
info@electromach.nl  
www.electromach.com

Bank: ABN-AMRO 24.35.24.439  
IBAN: NL73ABNA0243524439  
BIC: ABNANL2A  
KVK nr: 06040491

Bank: ABN-AMRO 59.01.14.573  
IBAN: NL29ABNA0590114573  
BIC: ABNANL2A  
VAT/BTW: NL 003578458B01

Leveringen geschieden  
overeenkomstig onze voorwaarden.  
*Deliveries subject to our general  
conditions of sale.*

## Load break switches

A typical energy distribution panel can be divided into different functional assemblies. They are distinguished by the following features.

- Input assembly, such as fuses, circuit breakers or load break switches
- Safe and simple:
  - Degree of protection IP 20
  - Compact by direct connection
  - Retrofittable auxiliary contacts
  - Ambient temperature - 60 °C... + 80 °C
  - Rated up to 180 A

## Outgoing circuits

Outgoing circuits with overcurrent protection, residual current protection and motor starters.

- Innovative breaker technology - safe and simple
- All new modules with a degree of protection IP 20
- Compact by direct connection
- New function involved
- MCCB in module technology up to 125 A
  - at 690 V for IEC and at 600 Y/347V for NEC/CEC

More details on [www.electromach.com](http://www.electromach.com). Please enter the WebCode.

WebCode 8544A

WebCode 8549A

WebCode 8565A

WebCode 8146D

WebCode 8562A

WebCode 8562B

WebCode 8562C

WebCode 8562D

**ELECTROMACH B.V.**

Jan Tinbergenstraat 193  
7559 SP Hengelo  
The Netherlands

T +31 (0)74 2 472 472  
F +31 (0)74 2 435 925  
info@electromach.nl  
www.electromach.com

Bank: ABN-AMRO 24.35.24.439  
IBAN: NL73ABNA0243524439  
BIC: ABNANL2A  
KVK nr: 06040491

Bank: ABN-AMRO 59.01.14.573  
IBAN: NL29ABNA0590114573  
BIC: ABNANL2A  
VAT/BTW: NL 003578458B01

Leveringen geschieden  
overeenkomstig onze voorwaarden.  
*Deliveries subject to our general  
conditions of sale.*